




# Tetra Pak® Plate Heat Exchanger H5

Gasketed plate heat exchanger for hygienic applications

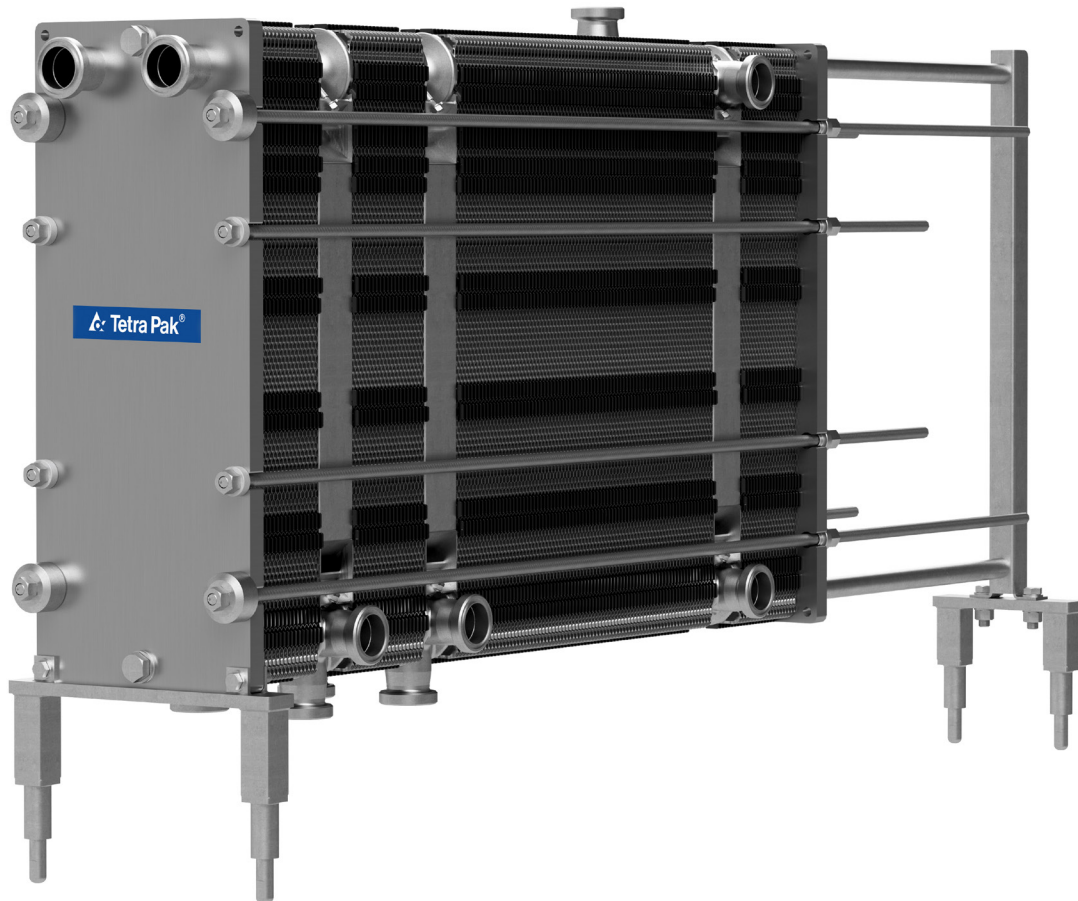

## Introduction

Tetra Pak® Plate Heat Exchanger H5 is a range of premium heat exchangers specifically developed for, dairy, beverage and other industries where hygiene standards must not be compromised.

The optimal flow distribution ensures superior cleanability and long operating times. Our special plate pattern provides gentle treatment of delicate products. Several innovative design features of both plate and gasket enable safe food production.

## Benefits

Superior hygienic standards – plates designed with food safety as top priority:

- Gentle treatment of sensitive products
- Superior distribution for long running hours
- Gives a plate package with perfect match between the plates
- Flexible configuration – possible to rebuild the heat exchanger

## Applications

- Food and beverage
- Dairy

## Features

Every detail is carefully designed to ensure the highest hygienic standards, gentle product treatment and efficient cleaning. Selection of available features, depending on configuration some features may not be applicable:

- SmoothPort™
- ClipGrip™ gasket attachment
- Hygienic leak chamber
- SteerLock™ plate alignment
- Interchangeable corners
- Hygienic adjustable feet
- EquiFlow™
- CleanChannel™

Trademarks belongs to Alfa Laval

### General remarks for technical information

- The global offering presented in this leaflet may not be available for all regions
- All combinations may not be configurable

### Technical data

<b>Plates</b>	P
<b>Type</b>	Single plate
<b>Free channel</b>	3.00 mm (0.12 inches)
<b>Materials</b>	
Heat transfer plates	Alloy 316, Titanium
Field gaskets	NBR, EPDM
Frame and pressure plate	Solid stainless steel Cladded stainless steel Carbon steel, epoxy painted

Other materials may be available on request.

The plate heat exchanger is manufactured according to 3A certification. The gaskets are produced in compliance with the regulations of FDA.

### Operational data

Frame type	SG, PED	FM, PED
<b>Max. design pressure</b>	16.0 barg / 232 psig	11.0 barg / 159 psig
<b>Max. design temperature</b>	160 °C / 320 °F	160 °C / 320 °F

Extended pressure and temperature rating may be available on request.

### Connections

Clamp, SMS, DIN (unions and flanges), BS/RJT, FN1, and IDF/ISO.

### Dimensional drawing

Measurements mm (inches)

